

Hubbellock® Devices  
60A, 600V AC, 4 Pole, 5 Wire Grounding  
Hubbellock® Plug

# HUBBELL

## Features

- Molded-in male contacts are resistant to damage and provide a consistently positive connection
- Insulated, color coded metallic housing enhances safety and abuse resistance
- Box terminals in conjunction with stainless steel terminal screws provide maximum termination strength and dependability

## Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Black phenolic interior with blue thermoplastic sleeve and steel housing	1.00"-1.50"(25.40-38.10)	783585017334	HBL26519

## Listings

Listed to UL Standard  
Certified to CSA Standard

## Specifications

Device Color	Black/White
Housing	Nylon
Cord Clamp Material	PET
Plug Housing	Thermoset
Contacts	Brass
Terminal Screws	Zinc plated steel
Assembly Screws	Stainless Steel

## Performance

### Electrical


Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage Withstand	2,000V minimum

### Mechanical

Terminal Accommodation	#8 AWG - #4 AWG stranded copper wire only.
Terminal Identification	Terminals identified in accordance with UL 498

### Environmental

Flammability	HB or better
Moisture Resistance	IP30 Suitability
Operating Temperatures	Maximum Continuous 75°C; Minimum -40°C (w/o impact)

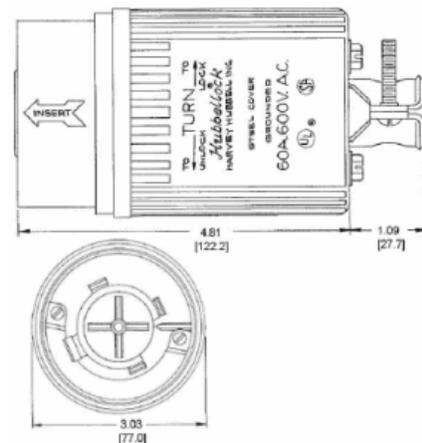

## Accessories

Connector	HBL26516
Long Single Receptacle	HBL26520
Flanged Receptacle	HBL26521

## Resources

Customer Use Drawing  
eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

